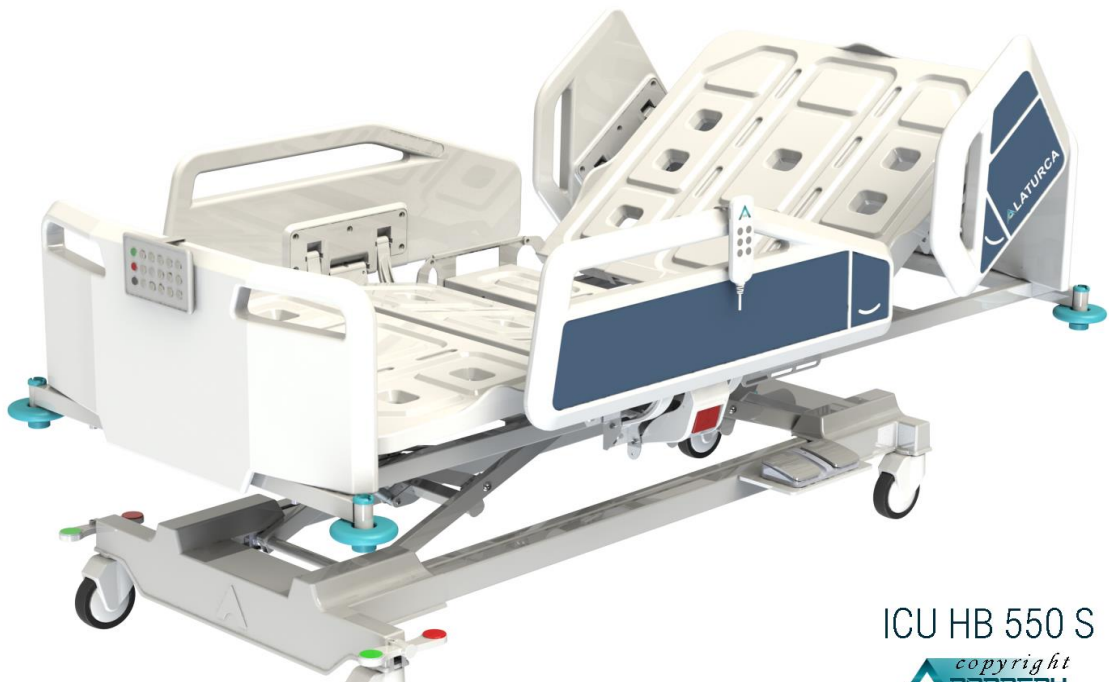
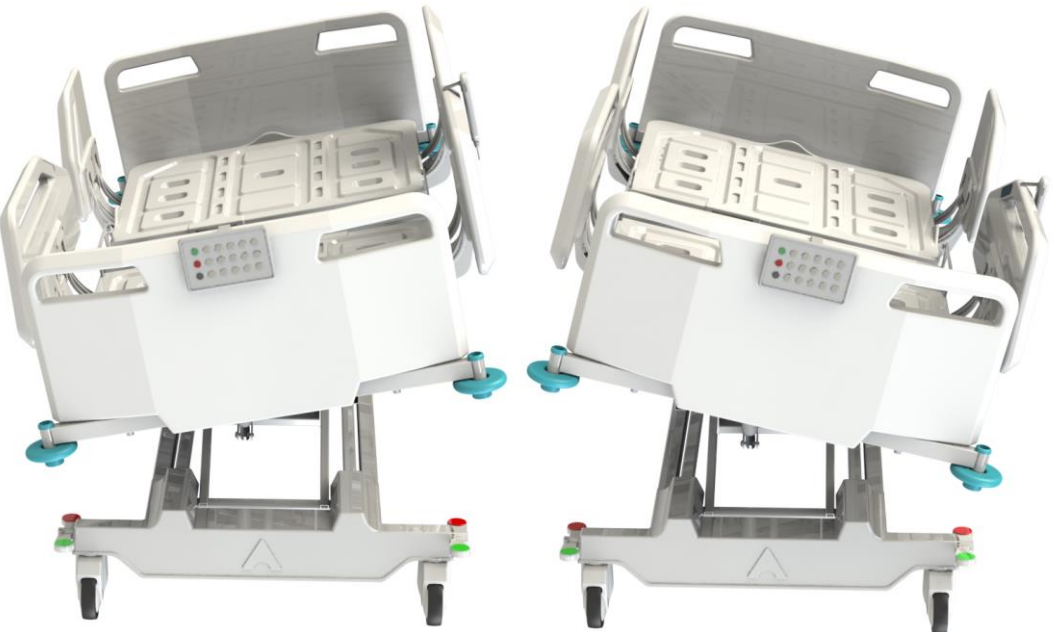




ICU HB 550 S

copyright
LATURCA



ICU HB 550 S FIVE FUNCTION MOTORIZED INTENSIVE CARE HOSPITAL BED

- SUITABLE FOR

CONSTRUCTION

COATING

FUNCTION & POWER

SAFETY

PLATFORM

MOBILITY

EQUIPPED WITH
- Intensive Care Units, Clinics, Long term cares, Nursing, Home care, Academic studies.

Made of steel construction. Gas metal arc welding technique provides strength and durability.

All metal constructions are painted with the high quality epoxy powder paint at 180°C.

ICU HB 550 S , backrest, foot part, height, trendelenburg and lateral tilt movements are made by 6000 N/m³ electric actuators. Equipped with electronic CPR function. More comfortable nursing due to lateral tilt movement. Patient weight can be monitored instantly on the LCD screen.





PP plastic head and foot boards and side rails secure the patient. Plastic bumpers at each corner.

The bed platform is covered with anti-bacterial, special design ABS thermo-vacuum plastic coating. Back part is X-RAY permeable HPL compact laminate so the bed can be used for radiological processes.

Equipped with 125 mm diameter wheels with central brake and directional locking system.

Back up battery, IV pole, Drainage bag holder, Corner bumpers, Universal brackets for lifting pole and orthopedic traction set.

ICU HB 550 S ALL FUNCTIONS

HEIGHT	BACK REST	LEG REST	CHAIR	TRENDELBURG	R.TRENDELBURG	LATERAL TILT
45-80 CM	ADJUST 0-35°	45-80 cm		12°	12°	13°
						
ACTUATOR	ACTUATOR	ACTUATOR	ACTUATOR	ACTUATOR	ACTUATOR	ACTUATOR
6000 N/m ³	6000 N/m ³	6000 N/m ³	6000 N/m ³	6000 N/m ³	6000 N/m ³	6000 N/m ³

OPTIONS AND HARDWARE

AUTO REGRESSION	✓ CPR CARDIOLOGICAL	✓ PEDAL HI-LOW	OPT X RAY PLATFORM	✓ PNEUMATIC 5th WHEEL	OPT LIFTING POLE	OPT LENGTH EXTENSION
						

INFORMATIONS

DIMENSIONS		INFO		STANDARDS		TRANSPORTATION
WIDTH / mm	1050	POWER	24 VDC 5A / 12 VDC 10A	ISO 13485	ISO 9001	PACKAGING
LENGTH / mm	2100	PROTECT	IP 66	ISO 45001	ISO 14001	Cartoon Box
HEIGHT / mm	450-800	WARRANTY	2 Years	ISO 10002	CE	40 FT CONTAINER
WEIGHT / Kg	132	MDR	Class I	UDI-DI No: 8683255452064AE		76 Pcs.